

**LEVA**

50 Beam

Leva 50 Beam comes with a light emission of about 80° asymmetric for recessed mounting, e.g. for step / stair lighting or similar small lighting tasks. Weather resistant, therefore suitable for indoor and outdoor.




**Technical Specification**

Operation Voltage	12 VDC
Power Consumption	0.25 W
Beam Angle *	80° Asymmetric
Color LED	2700K & 4000K or B/ R/ G/ Y
Color Fixture	Silver + Clear
Material	Stainless Steel + Polycarbonate UV-Stabilized
IP Grade	IP44 (IP67 when the terminal space is filled with silicone)
Ambient Temperature Range	-20°C - +45°C
Ambient Humidity Range	10% - 95% RH
Accessories	Recessed casing available

\* IES file available on request

**Product Dimension Drawings**

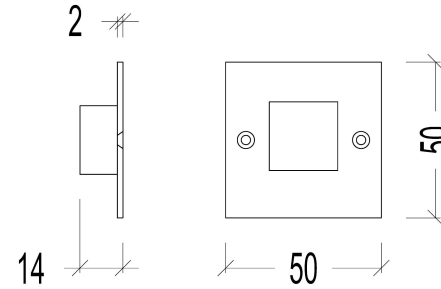

**Technical Specification**

