


COLIBRI


PL-50

The Colibri PL-50 is a compact and sturdy LED cube, measuring just 5 cm along each edge, with a matte, smooth finish. This small yet powerful lighting solution is perfectly suited for both facade and ceiling applications, adding a distinctive touch to architectural designs. Its robustness is a key feature, making it an excellent choice for ground installations in driveways or pedestrian areas.

Ideal for adding intricate lighting accents to exteriors or interiors, the Colibri PL-50 blends durability with aesthetic appeal, suitable for a wide range of architectural styles.

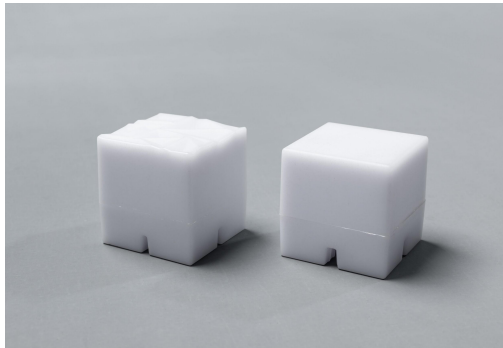

Product Dimension Drawings

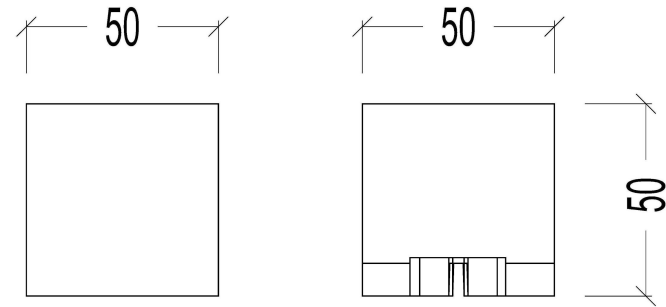

Technical Specification

Technical Specification

| | |
|---------------------------|---|
| Operation Voltage | 12 VDC |
| Power Consumption | 0.25 W |
| Color LED | 2700K & 4000K or B/ R/ G/ Y |
| Color Fixture | White Diffuse |
| Material | Polycarbonate UV-Stabilized |
| IP Grade | IP44 (IP67 when the terminal space is filled with silicone) |
| Ambient Temperature Range | -20°C - +45°C |
| Ambient Humidity Range | 10% - 95% RH |
| Accessories | Recessed casing available |

