


Lineare

LL-040

A mid-power linear glaze light, the Lineare LL-040, with its various beam angle options, is suitable for lighting up hallways or outdoor paths in residential or commercial settings, providing both functionality and visual appeal.



Product Dimension Drawings

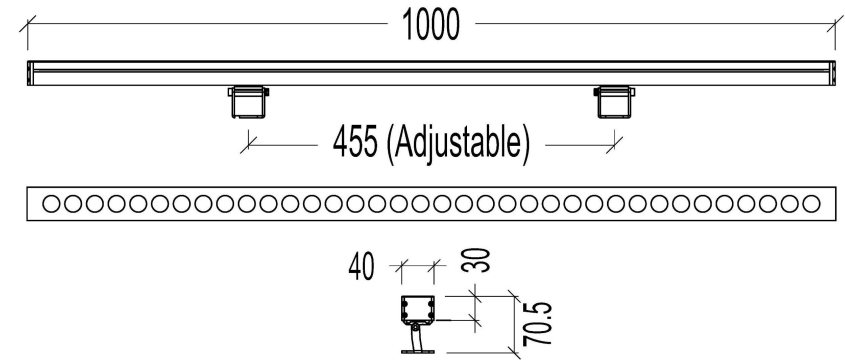

Technical Specification

Operation Voltage	24 VDC
Power Consumption	24 W
Luminous Flux	3120 lm
Beam Angle *	10° / 25° / 45° / 60° / 10* 20° / 15*45° / 30*60°
Color LED	2700 K – 6500 K
Color Fixture	White, Grey, Black
Color Rendering	≥ 80
Material	High Strength Aluminium Alloy Profile + High-Definition Tempered Glass
IP Grade	IP66
Ambient Temperature Range	-20°C - +45°C
Ambient Humidity Range	10% - 95% RH
Control Mode	1-10 V, DMX or DALI

* IES file available on request