

MOSAIC
SQ-20 CL

Brighter than the Mosaic SQ-20 due to its clear surface and light guide fins, the Mosaic SQ-20 CL excels in areas needing high luminous efficacy. Its enhanced brightness makes it ideal for facade and ceiling applications, where it can highlight architectural details or provide focused ceiling illumination.

This model combines intensified light output with a sleek design, perfect for modern architectural needs, especially in high-visibility environments.




Technical Specification

Operation Voltage	12 VDC
Power Consumption	0.25 W
Beam Angle *	80° Asymmetric
Color LED	2700K & 4000K or B/ R/ G/ Y
Color Fixture	Clear Diffuse
Material	Polycarbonate UV-Stabilized
IP Grade	IP44 (IP67 when the terminal space is filled with silicone)
Ambient Temperature Range	-20°C - +45°C
Ambient Humidity Range	10% - 95% RH
Accessories	Recessed casing available

* IES file available on request

Product Dimension Drawings

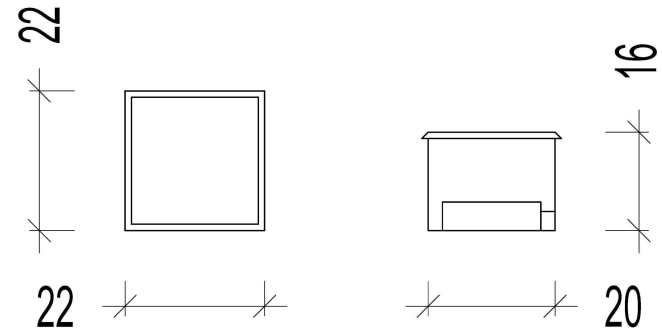

Technical Specification

