

BEAM

SQ-20 CL

Brighter than the Mosaic SQ-20 due to its clear surface and light guide fins, the Beam SQ-20 CL excels in areas needing high luminous efficacy. Its enhanced brightness makes it ideal for facade and ceiling applications, where it can highlight architectural details or provide focused ceiling illumination.

This model combines intensified light output with a sleek design, perfect for modern architectural needs, especially in high-visibility environments.




Technical Specification

| | |
|---------------------------|---|
| Operation Voltage | 12 VDC |
| Power Consumption | 0.25 W |
| Beam Angle * | 80° Asymmetric |
| Color LED | 2700K & 4000K or B/ R/ G/ Y |
| Color Fixture | Clear Diffuse |
| Material | Polycarbonate UV-Stabilized |
| IP Grade | IP44 (IP67 when the terminal space is filled with silicone) |
| Ambient Temperature Range | -20°C - +45°C |
| Ambient Humidity Range | 10% - 95% RH |
| Accessories | Recessed casing available |

* IES file available on request

Product Dimension Drawings

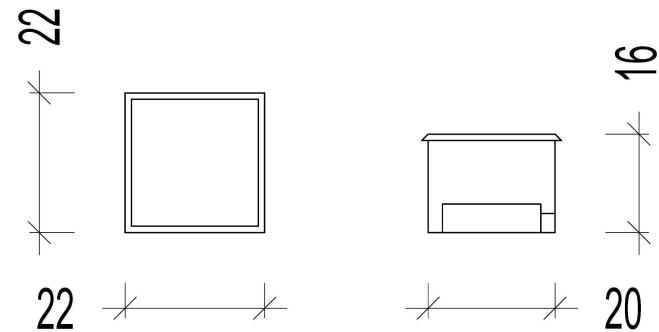

Technical Specification

