

## LEVA

50 Diffuse


Leva 50 Diffuse comes with a diffused light emission for recessed installation in floor, ceiling, wall etc. Weather resistant, therefore suitable for indoor and outdoor.



### Technical Specification

Operation Voltage	12 VDC
Power Consumption	0.25 W
Color LED	2700K & 4000K or B/ R/ G/ Y
Color Fixture	Silver + White
Material	Stainless Steel + Polycarbonate UV-Stabilized
IP Grade	IP44 (IP67 when the terminal space is filled with silicone)
Ambient Temperature Range	-20°C - +45°C
Ambient Humidity Range	10% - 95% RH
Accessories	Recessed casing available

### Product Dimension Drawings

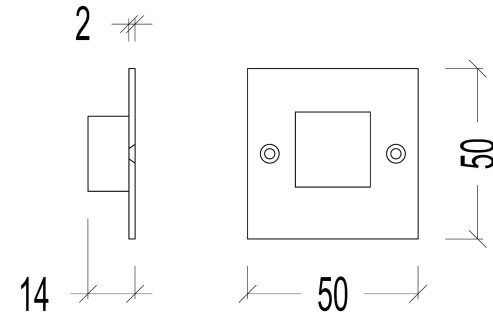

### Technical Specification

