


Beam

FL-0211

As a mid-power square floodlight, the Beam FL-0211 is ideal for smaller commercial buildings or upscale residential complexes. Its elegant design and beam angle versatility make it perfect for highlighting architectural details or providing ambient outdoor lighting.



Product Dimension Drawings

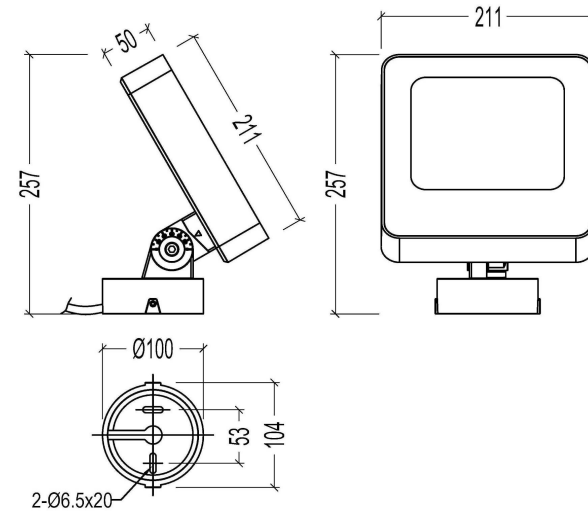

Technical Specification

Operation Voltage	220-240 VAC
Power Consumption	48 W
Luminous Flux	2880 lm
Beam Angle *	10° / 20° / 30° / 40° / 60°
Color LED	2700 K – 6500 K, RGBW
Color Fixture	White, Grey, Black
Color Rendering	≥ 80
Material	Die Casting Aluminium
IP Grade	IP66
Ambient Temperature Range	-20°C - +45°C
Ambient Humidity Range	10% - 95% RH
Control Mode	1-10 V, DMX or DALI

* IES file available on request